

950/3

21 June-2025

TO,

CALL FOR QUOTATION

Subject: **Request for Quotation — Construction of Overhead Covered Walkway**

Dear Sir/Madam,

1. Foundation & Base

- **Excavation:**
 - Excavation pits: 300 mm x 300 mm x 750 mm deep for each column footing.
- **PCC Base:**
 - 100 mm thick PCC (1:2:4) at the base of the foundation pit to provide a level base and prevent settlement.

2. MS Pole Structure

1. **Vertical Supports:**
 - a. Material: MS pipe, 100 mm diameter, 4 mm thick (as noted).
 - b. Spacing: 3.0 meters center-to-center (c/c).
 - c. Height: As per the design sketch (approx. 3.0–3.5 meters above ground level).
 - d. Fixing: Poles embedded into the PCC footing (minimum 300 mm embedment) and anchored using 4 nos. 12 mm diameter foundation bolts.
 - e. Finish: Two coats of anti-corrosive primer and two coats of synthetic enamel paint.

3. Truss & Roofing Structure

1. **Truss:**
 - a. Frame: 40x40x3 mm MS square tube members forming the truss.
 - b. Top chord & diagonal members: 40x40x3 mm MS square tubes.
 - c. Horizontal tie member: 60x60x3 mm MS square tube.
 - d. Bracing & stiffeners: 40x40x3 mm MS square tubes, as per drawing detail.
 - e. Roof pitch: As per design slope (typically 10–15 degrees).
 - f. Joint connections: Welded connections with gusset plates where required.

2. **Configuration:**



- a. Type: Triangular pitched roof truss with vertical and diagonal bracing.
- b. Top Chord: 40x40x3 mm MS square tube.
- c. Bottom Chord (Tie Member): 60x60x4 mm MS square tube.
- d. Vertical Members: 40x40x3 mm MS square tube.
- e. Diagonal Members: 40x40x3 mm MS square tube.
- f. Connections: Welded (full weld) at all intersections; gusset plates at critical joints for added stability.

3. Member arrangement:

- a. **Top Chord Slope:** Approximately 15 degrees to facilitate water drainage.
- b. **Diagonals:** Symmetrical X-bracing within the truss, connecting the top chord to the bottom chord and between vertical members for load transfer and stability.
- c. **Vertical Posts:** Two at each end of the span, supporting the truss and connecting to foundations.

4. Roofing Sheet:

- a. Material: 0.5 mm thick color-coated galvalume sheet.
- b. Profile: Trapezoidal or sinusoidal profile sheet with overlaps at edges and ridge capping for water tightness.
- c. Fixing: Self-drilling screws with EPDM washers at every 300 mm spacing along supports.
- d. Roof Overhang: Min. 150 mm on both sides beyond walkway width.

4. Additional Details


- a. **Ridge Capping:** Color-coated ridge cap matching roofing sheet.
- b. **Rainwater Management:** Provide drip edges or gutters to direct water away from walkway edges.
- c. **Surface Finish:** All exposed metal surfaces to be cleaned, primed with anti-corrosive primer, and painted with two coats of synthetic enamel paint.

5. Construction sequence

1. **Layout** — Mark the alignment on the ground, set out pole positions at 3.0m c/c spacing.
2. **Excavation** — Dig 300x300x750 mm pits at each marked pole position.
3. **PCC Base** — Pour 100 mm thick PCC (1:2:4) in each pit base and allow to cure.
4. **MS Pole Erection** — Place 100 mm dia MS poles, ensuring vertical alignment with the help of a plumb bob and level.
5. **Truss Framing** — Fabricate trusses on-site or in a workshop; fix them on top of the poles using welded or bolted connections.
6. **Roofing** — Fix 0.5 mm thick galvalume sheets to the truss with self-drilling screws and EPDM washers.
7. **Finishing** — Paint all steel surfaces; install ridge capping and rainwater drip edges.


6. Recommendations

1. Check pole alignment carefully to avoid misalignment of roof frames.
2. Ensure welding quality is adequate and meets IS standards.

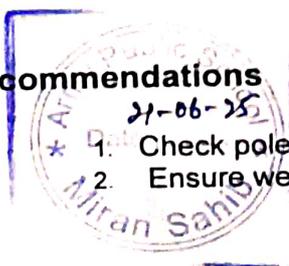

3 Provide at least 1:100 slope for the roof to facilitate drainage.

7. Drawing:

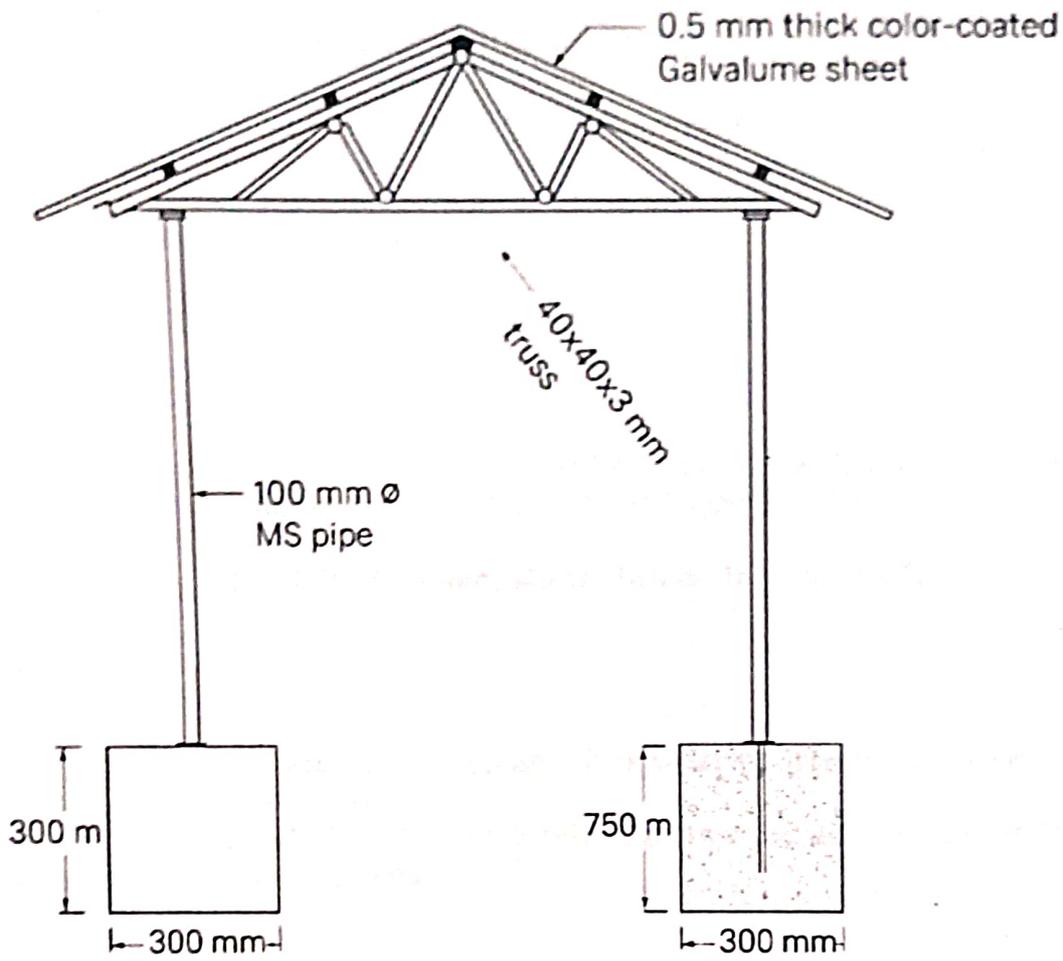

8. Dimensions: Width : 6 Feet, Length: 774 Feet, Height : 11 Feet From Ground Level)

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.
6. GST registration details and applicable taxes.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Construction of Walking Path", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.
2. Vendors are requested to kindly visit the school and inspect the site before quoting to ensure accurate estimation of requirements.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



R. Sharma
Principal
Army Public School
Miran Sahib, Jammu

950/3

21 June-2025

TO,

CALL FOR QUOTATION

Subject: Request for Quotation — Construction of Walking Path

Dear Sir/Madam,

Army Public School, Miran Sahib invites sealed quotations from reputed and experienced contractors/suppliers for the **Construction of Walking Path** as per the following specifications and requirements:

DETAILED SPECIFICATION

1. Earthwork & Site Preparation

- **Clearing & Grubbing:** Remove vegetation, roots, loose debris, and any unsuitable soil to achieve a stable subgrade.
- **Excavation:** Excavate to the required depth to accommodate the structural layers below the top finished level of the interlocking pavers.
- **Leveling & Compaction:** Level and compact the subgrade with mechanical compactors to achieve at least 95% modified Proctor density.

2. Hardcore Layer

- **Material:** Broken stone of 40 mm to 63 mm nominal size, clean and free from dust, clay, and other impurities.
- **Thickness:** 100 mm after compaction.
- **Laying:** Spread evenly in layers not exceeding 75 mm thickness, each layer compacted thoroughly with a mechanical compactor.

3. PCC Sub-base Layer

- **Material:** Plain Cement Concrete of 1:3:6 mix (1 part cement: 3 parts coarse sand: 6 parts 20 mm aggregate).
- **Thickness:** 100 mm.
- **Laying:** Place concrete over the compacted hardcore in one continuous pour, level using screed boards and compact using a vibrator or tamping rod.
- **Curing:** Keep moist for a minimum of 7 days.



4. Sand Cushion Layer

- **Material:** Clean, well-graded river sand.
- **Thickness:** 50 mm.
- **Laying:** Spread uniformly and level carefully, ensuring proper slope for drainage if required. Compact lightly with a plate compactor.

5. Top Layer – Interlocking Pavers

- **Material:** Pre-cast cement concrete paver blocks, 60 mm thick, Multi color.
- **Laying:** Lay interlocking pavers over the sand cushion, ensuring tight joints.
- **Compaction:** After laying, compact the surface using a plate compactor with a rubber mat to avoid chipping.
- **Joint Filling:** Brush fine sand into the joints and re-compact.

6. Side Coping (Edge Restraint)

- **Material:** PCC 1:2:4 mix (1 part cement: 2 parts coarse sand: 4 parts aggregate).
- **Size:** Typically 150 mm wide x 150 mm deep, extending vertically below the paver block layer.
- **Placement:** Cast-in-situ concrete on both sides of the walkway to provide lateral support and prevent paver displacement.

7. Finishing & Clean-up

- Clean the surface thoroughly.
- Ensure proper drainage slope (usually 1-2% cross slope).
- Remove any excess sand or debris.



Pr. Sharma
Principal
Army Public School
Miran Sahib, Jammu

DRAWING

Here's a **simplified cross-sectional drawing** showing the construction layers:

|----- 5 feet -----|

| Top Layer | 60 mm Interlocking Pavers (black) |

| Sand Cushion | 50 mm Clean Sand |

| PCC Sub-base | 100 mm PCC 1:3:6 |

| Hardcore Layer | 100 mm Broken Stone (40-63 mm) |

| Subgrade | Compacted Earth |

| Side Coping | PCC 1:2:4 @ both sides |


| | (150 x 150 mm typical) |

Dimensions: (5 feet Width and 774 Feet in Length)

Notes:

- Drainage slope: typically 1-2% cross slope.
- Subgrade preparation is crucial to avoid settlement.
- Side coping should extend slightly below the bottom of the paver layer to lock the edge.s

21-06-25
Quotation Submission Requirements

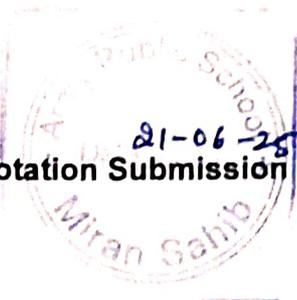

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.
6. GST registration details and applicable taxes.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Construction of Walking Path", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.
2. Vendors are requested to kindly visit the school and inspect the site before quoting to ensure accurate estimation of requirements.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Srs Shaama
Principal
Army Public School
Miran Sahib, Jammu

21 - June-2025

950/3

TO,

CALL FOR QUOTATION

Subject: **Request for Quotation — Procurement and Installation of Digital Bell System for School**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S. No.	Item Description	Quantity
01	<p><u>Procurement and Installation of Digital Bell System for School</u></p> <p>Objective:</p> <p>To install a reliable and programmable digital bell system that ensures punctual timekeeping and smooth conduct of school activities across all three floors of the school building.</p> <p>Scope of Work:</p> <ul style="list-style-type: none">• Supply, installation, and commissioning of a centralized digital bell system.• Wiring and speaker distribution on all three floors.• Synchronization with school timetable and automation of bell schedules. <p>Requirements & Specifications:</p> <p><u>1. Digital Bell Control Unit</u></p> <ul style="list-style-type: none">• Type: Microcontroller-based or PLC-based programmable digital bell controller.• Display: LCD/LED digital interface.• Timer Settings: Weekly programmable schedule (Monday to Saturday).• Modes: Manual & automatic.• Power Supply: 220V AC with battery backup (minimum 4 hours).• Memory: Minimum 50 bell timings per day.• Connectivity: Wireless remote or LAN-supported for schedule update (optional).	01



2. Amplifier System

- **Output Power:** 500W.
- **Type:** PA (Public Address) amplifier with multiple zone support.
- **Features:** Volume control, overload protection, AUX/mic input for emergency announcements.

3. Speaker System

- **Type:** Wall-mounted PA horn or box speakers.
- **Sound Level:** Minimum 90 dB.
- **Coverage:** 3 speakers per floor
- **Wiring:** surface wiring using ISI-marked copper cables.

4. Wiring & Accessories

- **Cables:** ISI-marked 2-core copper wire (Polycab/Havells preferred). –Qty - 900 meter
- **Conduits:** PVC, ISI-marked, 50mm x 16mm. Qty – 300 meter
- **Switches/Connectors:** Branded and fire-retardant grade.

Installation Layout:

- **Ground Floor:** 3 speakers
- **First Floor:** 3 speakers
- **Second Floor:** 3 speakers
- **Control Unit Location:** school server room

Vendor Deliverables:

- Complete system supply and installation.
- User training and operation manual.
- 1-year onsite warranty and support.
- Post-installation testing and verification.


Estimated Timeline:

- **Procurement & Delivery:** 15 days
- **Installation & Setup:** 3 days
- **Testing & Commissioning:** 1 day

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).

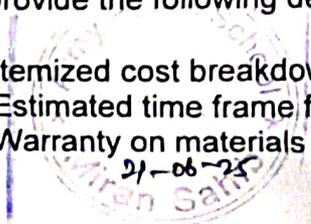

4. Terms and conditions of service.
5. Validity period of the quotation.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement and Installation of Digital Bell System for School", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Dr. Shaama
Principal
Army Public School
Miran Sahib, Jammu

21 June-2025

950/3

TO,

CALL FOR QUOTATION


Subject: **Request for Quotation — Supply and Installation of EPABX**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S.NO	PARTICULAR	QTY
1	Analog EPABX – Brand Name CCL, with power supply having 32 Analog intercom Ports & 2 incoming Ports with 1 Year Warranty , (31 required connections and 1 Extra)	1 Unit
2	50 Pair MDF with Krone Module [including punching at exchange side] – At Exchange Room (IT Cell).	1 Piece
3	20 Pair MDF with Krone Module Ground Floor, Second Floor.	2 Piece
4	10 Pair MDF with Krone Module First Floor & Corners of the Corridors.	6 Piece
5	OFC for Connection to Main Gate and MPH	100 Meter
6	Media Converters for each connection of OFC, i.e. Main Gate & MPH	02 Pair
7	Wall Mount Racks for housing media Converters along with three extension cables	03 Piece
8	Beetel Telephone with Caller ID	3 Piece
9	Beetel Telephone without Caller ID	28 Piece
10	Landline Telephone Patch Cords + Connection Box	01
11	Single Pair Cable complete with supply, laying, Labour Charges & Fitting along with the cost of PVC Bettons	2000 Mtrs
12	10 Pair, 12 Pair Cable complete with supply, laying & Fitting	200 Mtrs
13	Installation & Commissioning Charges, Testing & Correction of Faults (if any), Courier & Freight Charges are Included.	01 Service
14	Miscellaneous Expenses/ Other	-
15	AMC (Year 1) is part of Warranty Period	Year 2
		Year 3

21-06-25

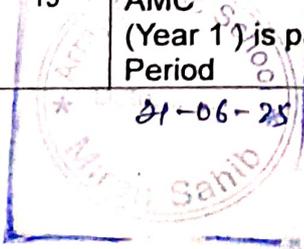

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.
6. GST registration details and applicable taxes.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Supply and Installation of EPABX", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.
2. Vendors are requested to kindly visit the school and inspect the site before quoting to ensure accurate estimation of requirements.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



S. Sharma
Principal
Army Public School
Miran Sahib, Jammu

21 - June-2025

950/3

TO,


CALL FOR QUOTATION

Subject: **Request for Quotation — Procurement of Ride on Lawn Mover with Grass Box**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S.NO	PARTICULAR WITH MINIMUM SPECIFICATIONS	QTY
1	Ride on Lawn Mover with Grass Box	1
	Engine	K 1600 AVD
	Capacity	452cc
	Cruise Control	No
	Blade Engagement	Electromagnetic Clutch (Button)
	Mulching Kit	Included
	Cutting Type	Collection, Mulch & Collect
	Starting Method	Electric Start
	Blades	2
	Cylinders	Single Cylinder
	Trailer Hitch	Included
	Dimensions	L: 250cm x W: 109cm x H: 110cm
	Item Weight	200.kg
	Fuel Capacity	7.5 Litre
	Grass Box	300 Litre
	Height of Cut Positions	7 Positions
	Height of Cut Range	30 - 90mm
	Speeds	Forward: 0-8.8km/h / Reverse: 0-4.5km/h
	Hydrostatic Transmission	Pedal-operated Tuff Torq K46DR
	Wheels	Front 15 × 6.00-6 Rear 18 × 8.50-8
	Width of Cut	102cm / 40"
	Warranty	5 Years Domestic *subject to T&C

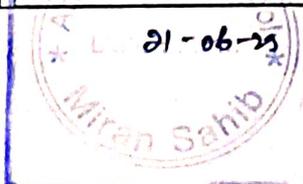

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.
6. GST registration details and applicable taxes.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement of Ride on Lawn Mover with Grass Box", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.
2. Vendors are requested to kindly visit the school and inspect the site before quoting to ensure accurate estimation of requirements.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.




Principal
Army Public School
Miran Sahib, Jammu

21 - June-2025

950/3

TO,

CALL FOR QUOTATION

Subject: **Request for Quotation — Construction of Assembly Stage**

Dear Sir/Madam,

SPECIFICATIONS FOR CONSTRUCTION OF ASSEMBLY STAGE

1. Dimensions:


- a. **Width:** 35 feet
- b. **Length:** 45 feet
- c. **Height:** 4.5 feet from ground level.

2. Foundation:

- a) **Depth:** 4 feet (1.22 meters) below ground level.
- b) **Width of footing:** 30 inches (760 mm).
- c) **Footing Details:**
- d) **Bottom Layer (PCC Bed):**
 - a. 4 inches thick (100 mm).
 - b. Ratio: 1:4:8 (cement: sand: graded stone aggregate).
- e) **Brick Masonry Footing:**
 - a. Steps with dimensions as per drawing:
 - b. 30", 26", 24", 20", 18", and finally 12" width.
- f) **Cement mortar ratio:** 1:6.

3. Plinth & Superstructure:

- b) **Plinth Height:** 4.5 feet.
- c) **Brickwork:**
 - a. Burnt clay bricks (compressive strength min 75 kg/cm²).
 - b. 1:6 cement mortar.
- d) **Plaster:**
 - a. 12 mm thick plaster on both faces (1:4 cement mortar).
 - b. Smooth finish.

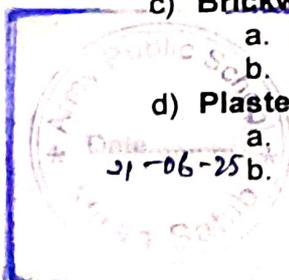

4. Stage Floor Finish:

a) Top Surface:

- a. 4 inches thick RCC slab (M20 grade; 1:1.5:3).
- b. Reinforcement: 10 mm dia @ 150 mm c/c both ways.
- c. **Stone finish** (kota stone).
- d. Laid on ½ inch thick 1:6 cement mortar bedding.
- e. Stone joints filled with cement slurry and finished flush.
- f. 6 inch Skutting each side of the

b) Skirting:

- a. Material: Same stone finish as the stage top.
- b. Height: 6 inches (150 mm) on each side of the stage (all around).
- c. Thickness: 20 mm (3/4") stone slab fixed with 1:6 cement mortar.
- d. Finish: Smooth, matching the floor, with neat cement grouting.
- e. Top Edge: Chamfered or slightly rounded to prevent chipping.

5. Backfilling:

a) Earth Filling:

- a. Well-graded soil, free of organic matter.
- b. Compact in 6-inch layers to 95% proctor density.

6. Drainage:

- a. Weep holes @ 3m c/c.
- b. Proper slope provided (minimum 1% slope towards drain outlets).

7. Staircases:

a) Three sets of stairs:

- a. **Front Left Side:** 5 feet wide.
- b. **Front Right Side:** 5 feet wide.
- c. **Back Side:** 5 feet wide.

b) Details:

- a. Tread: 12 inches.
- b. Riser: 6 inches.
- c. Stone finish to match stage floor.
- d. Handrails: 900 mm high (MS pipes).

8. Foundation Cross-Section Details:




4" PCC Bed (1:4:8)

- |
- |→ 30" wide brick footing (1st step)
- |→ 26" wide brick footing (2nd step)
- |→ 24" wide brick footing (3rd step)
- |→ 20" wide brick footing (4th step)
- |→ 18" wide brick footing (5th step)
- |→ 12" wide brick wall up to plinth level


9. Mortar Ratios:

- a. Foundation brickwork → 1:6 cement mortar.
- b. Plaster → 1:4 cement mortar.
- c. Stone fixing → 1:6 cement mortar.

10. Drawing:

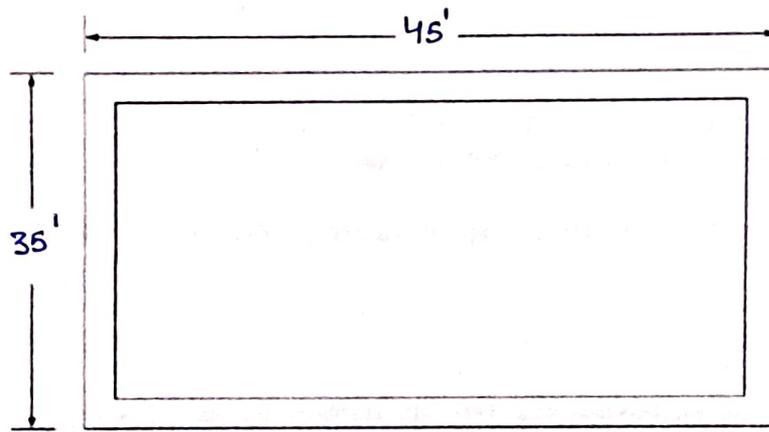

PLAN

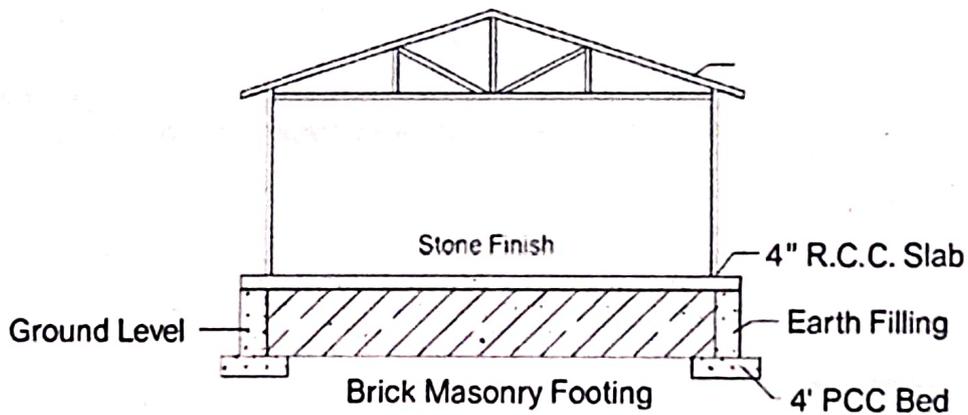

SECTION



Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.
6. GST registration details and applicable taxes.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Construction of Assembly Stage", and dropped in the tender box located at:


4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.
2. Vendors are requested to kindly visit the school and inspect the site before quoting to ensure accurate estimation of requirements.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.

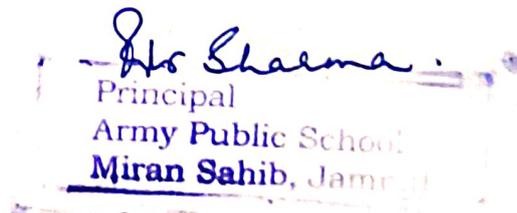

21 - June-2025

950/3

TO,

CALL FOR QUOTATION


Subject: **Request for Quotation —Procurement of 65” Led TV for Conference Hall**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S. No.	Item Description	Quantity
01	<p>Display Display Technology QLED Resolution 4K Refresh Rate 60 Hz Aspect Ratio 16:9 Contrast Ratio 1400:1 Viewing Angle 178 Degrees Maximum Display Brightness 350 Nit Screen Finish Type Flat HDR Format Supported HLG, HDR 10, Dolby Vision Motion Enhancement Technology MEMC Picture Quality Enhancement Technology HLG, HDR 10, MEMC, Dolby Vision, QLED HDR 10 Dolby Vision HLG 8 Bit + FRC Color Depth Response Time 8 Milliseconds Display Backlight Configuration Direct-Lit Has Color Screen Yes</p> <p>Measurements Screen Size Unit of Measure 65 Inches Item Dimensions D x W x H 7.6D x 145.3W x 83.8H Centimeters Item Weight Unit of Measure 15700 Grams Item Weight Without Stand 15.7 Kilograms</p> <p>Connectivity Network Connectivity Technology Bluetooth, Wi-Fi, USB, Ethernet, HDMI</p> <p>Audio Input HDMI Signal Format Digital Total Number of HDMI Ports 3</p>	02

21-06-25

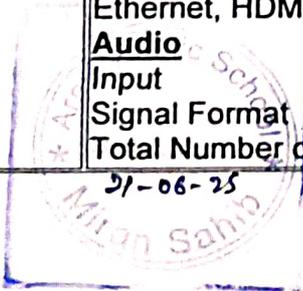

	Hardware Interface S/PDIF, Bluetooth, USB, Ethernet, HDMI Wireless Technology Type Bluetooth, Wi-Fi Screen Mirroring Technology AirPlay, Screen Sharing Bluetooth Version 5 Connector Type USB, Ethernet, HDMI Total USB 2.0 Ports 2 Total USB Ports 2 Content Sharing Direction Mobile to TV Audio Audio Output Mode Surround Speaker Description Speakers typically come in, which allows them to produce stereo sound. Built- Speaker Maximum Output Power 24 Watts Number of Audio Channels Dolby Atmos, 2.0 Channel Integrated Surround Sound Format Dolby Atmos, Dolby Digital	
02	Mobile TV Cart with Wheels for 32-65 Inch LCD LED 4K Flat Screen TVs, TV Floor Stand with Shelf Holds Up to 100 lbs Adjustable Height Trolley Max VESA 600 x 400 mm	02

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement of 65" Led TV for Conference Hall", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Pr. Sharma
Principal
Army Public School
Miran Sahib, Jammu

950/3

21 - June-2025

TO,

CALL FOR QUOTATION

Subject: **Request for Quotation —Procurement of Epson Ecotank L14150**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S. No.	Item Description	Quantity
01	Epson Ecotank L14150 – Features: <ol style="list-style-type: none">1. Display: 6.9 cm LCD Touch Screen2. ADF (Automatic Document Feeder): 35 sheets (64–95 gsm)3. Wireless: WiFi IEEE 802.11b/g/n, WiFi Direct4. Functions: Scan5. Connectivity: USB 2.0 and Ethernet6. Fax Features: PC FAX (Transmission & Receive)7. Duplex Printing: Automatic 2-sided printing (up to A4)8. Print Speed: Please refer to the datasheet (not included in image)9. Supported Paper Sizes: A3+, A3, A4, Bond, Legal, etc.10. Max Copying & Scanning Size: 21.6 x 35.6 cm	01

Quotation Submission Requirements

Please provide the following details in your quotation:


1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement of Epson Ecotank L14150", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important: 21/06/25

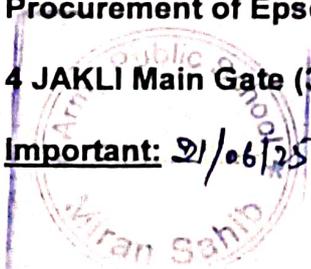

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Ms Sharma
Principal
Army Public School
Miran Sahib, Jammu

950/3

21 - June-2025

TO,

CALL FOR QUOTATION


Subject: **Request for Quotation —Procurement of 55" Led TV for Reception area**

Dear Sir/Madam,

1. Detailed Specification and Scope of Work

S. No.	Item Description	Quantity
01	Display Measurements Screen Size Unit of Measure 55 Inches Item Dimensions D x W x H 6D x 123.4W x 71.1H Centimeters Item Weight Unit of Measure 1200 Grams Display Size Class 55 Inches Connectivity Network Connectivity Tech Wi-Fi, USB, Ethernet, HDMI Audio Input Auxiliary Signal Format Analog Total Number of HDMI Ports 3 Hardware Interface Bluetooth, USB, Ethernet, HDMI Wireless Technology Type Bluetooth, Wi-Fi Screen Mirroring Technology Smart View, AirPlay 2 Bluetooth Version 5.2 Connector Type Bluetooth, HDMI Total USB 2.0 Ports 1 Total USB Ports 1 Content Sharing Direction Mobile to TV Audio Audio Output Mode Surround Speaker Description 2CH Powerful Speakers with Q-Symphony Speaker Maximum Output Power 20 Watts Number of Audio Channels OTS Lite Integrated Surround Sound OTS Lite, Adaptive Sound, Q- Symphony	02
02	Mobile TV Cart with Wheels for 32-55 Inch LCD LED 4K Flat Screen TVs, TV Floor Stand with Shelf Holds Up to 100 lbs Adjustable Height Trolley Max VESA 600 x 400 mm	02

21-06-25

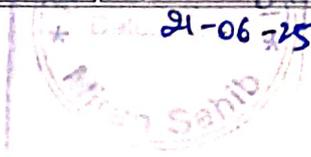

Quotation Submission Requirements

Please provide the following details in your quotation:

1. Itemized cost breakdown for each component/service.
2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement of 55" Led TV for Reception area", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

1. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Dr. Sharma
Principal
Army Public School
Miran Sahib, Jammu

950/3

21 - June-2025

TO,

CALL FOR QUOTATION

Subject: **Request for Quotation —Procurement of Epson Projector**

Dear Sir/Madam,


1. Detailed Specification and Scope of Work

S. No.	Item Description	Quantity
01	<p>Projector Brightness: 3300lm with HDMI Port</p> <p>Product Features Brightness & Network Connectivity Native Resolution Maximum Display Resolution Display Type Form Factor Mounting Type Lumens Colour Wattage Controller Type Compatible Devices</p> <p>3300 Lumens in Colour White Brightness), Speakers VGA, USB, HDMI 1024 x 768 1024 X 768 Pixels LCD Portable Ceiling Mount 3300 lumen White 50 Watts Remote Control Laptops, Smartphones, Gaming Consoles, Blu-ray Players, Other Media Players</p> <p>Contrast Ratio Maximum Throw Distance Light Source Operating Life Maximum Image Size Lamp Wattage Hardware Connectivity Control Method Minimum Throw Distance Minimum Image Size Picture Quality</p>	02
02	<p>Projector Laptop Stand Tripod Table Top and Floor Height Adjustable 2 to 4 Feet Foldable</p>	01

Quotation Submission Requirements

Please provide the following details in your quotation:

- Itemized cost breakdown for each component/service.

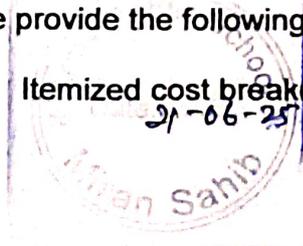

2. Estimated time frame for project completion.
3. Warranty on materials and workmanship (if applicable).
4. Terms and conditions of service.
5. Validity period of the quotation.

Submission of Quotation

Quotations must be submitted offline in a sealed envelope, clearly marked "Quotation for Procurement of Epson Projector", and dropped in the tender box located at:

4 JAKLI Main Gate (307) TCP, Kharian, Miran Sahib, Jammu, J&K.

Important:

2. No other mode of submission is acceptable. Quotations submitted via email, courier, or any other means will not be considered.

Submission Deadline

Kindly submit your quotation in the tender box by 29-06-25.



Dr. Shama
Principal
Army Public School
Miran Sahib, Jammu